




## MAGNETITE

### Slimline linear batten

Slimline linear batten fitting with polycarbonate LED opal diffuser. 50mm wide suitable for trunking systems.

- IP44 sealed
- T5 equivalent
- Range of outputs and lengths available
- Integral sensors for switching or dimming
- Hinged lid for ease of installation
- 137.9Lm/W
- CCT: 3000K / 4000K / 5000K
- Wattage: 11W to 68W
- Lengths: 600mm / 1200mm / 1500mm / 1800mm
- Integral emergency options
- Power Factor >0.9

### Dimensions

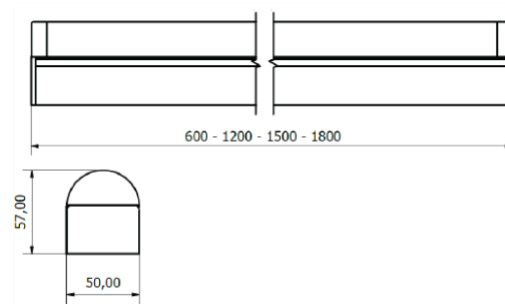

### Warranty

1-year guarantee available as standard

5-year extended warranty available on request

Description	Replaces	Weight (kg)	No. Per 10A Breaker	Inrush Current (A)	Circuit Watts (W)	Board Lumens	Luminaire Lumens	LI/cW
11W 600mm Slimline Batten	1 x 14W T5	0.90	100	8A 80µs	11	1517	1364	124.0
22W 600mm Slimline Batten	1 x 24W T5	0.90	50	4.5A 35µs	22	2995	2693	122.4
23W 1200mm Slimline Batten	2 x 28W T5	1.48	50	4.5A 35µs	23	3035	2728	118.6
33W 1200mm Slimline Batten	2 x 54W T5	1.48	40	10A 100µs	33	4408	3963	120.1
27W 1500mm Slimline Batten	1 x 49W T5	1.68	50	4.5A 35µs	27	3641	3273	121.2
40W 1500mm Slimline Batten	2 x 35W T5	1.68	35	5A 37µs	40	5290	4755	118.9
56W 1500mm Slimline Batten	2 x 49W T5	1.68	20	12A 50µs	56	7189	6463	115.4
80W 1500mm Slimline Batten	2x80W T5	1.68	20	30A 50µs	80	9539	8576	107.2
34W 1800mm Slimline Batten	1 x 70W T8	1.80	50	4.5A 35µs	34	4552	4092	120.4
68W 1800mm Slimline Batten	2 x 70W T8	1.68	20	12A 50µs	68	8987	8079	118.8