



OLIVINE

LED downlight


Compact fixed recessed downlight complete with integral driver. The Olivine comes in 10W, 20W or 30W and a range of cut-outs.

- IP20 sealed (IP44 version available)
- PL equivalent
- Tool-free assembly
- Spring clip pre-assembled
- Complete ready to apply solution comprising module, driver, reflector and trim ring
- 100Lm/W
- CCT: 3000K / 4000K
- Wattage: 10W / 20W
- Cut-outs: 100mm / 150mm / 200mm
- Integral emergency options
- Power Factor >0.9

Warranty

- 1-year guarantee available as standard
- 5-year extended warranty available on request

Dimensions

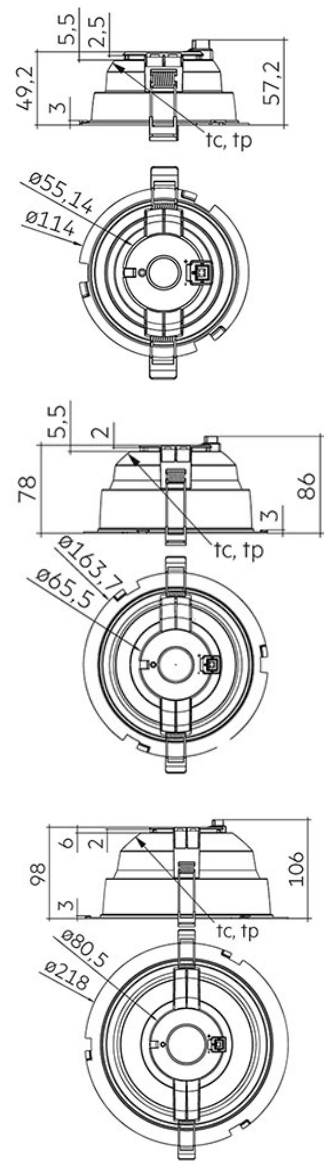

Description	Cut-out	Weight (kg)	No. Per 10A Breaker	Inrush Current (A)	Circuit Watts (W)	Luminaire Lumens	LI/cW
10W LED Downlight 60°	100mm	0.32	60	9A 100µs	10	1000	100.0
10W LED Downlight 90°	100mm	0.32	60	9A 100µs	10	1000	100.0
20W LED Downlight 60°	150mm	0.40	30	13A 150µs	20	2000	100.0
20W LED Downlight 90°	150mm	0.40	30	13A 150µs	20	2000	100.0
30W LED Downlight 60°	200mm	0.48	20	30A 60µs	20	3000	100.0
30W LED Downlight 90°	200mm	0.48	20	30A 60µs	20	3000	100.0